
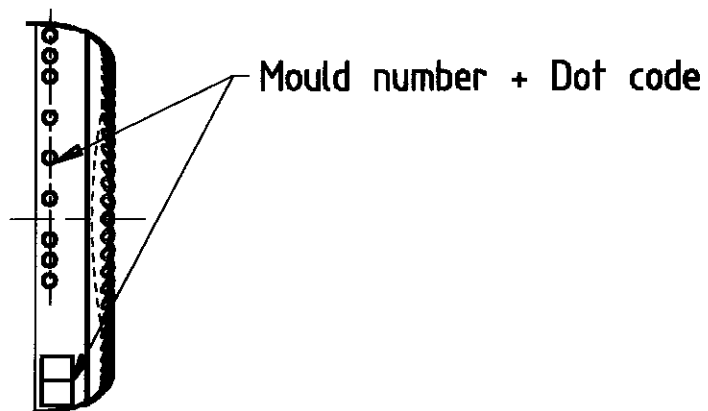


Einisch:
Schraubmundstueck 25
EN 15543

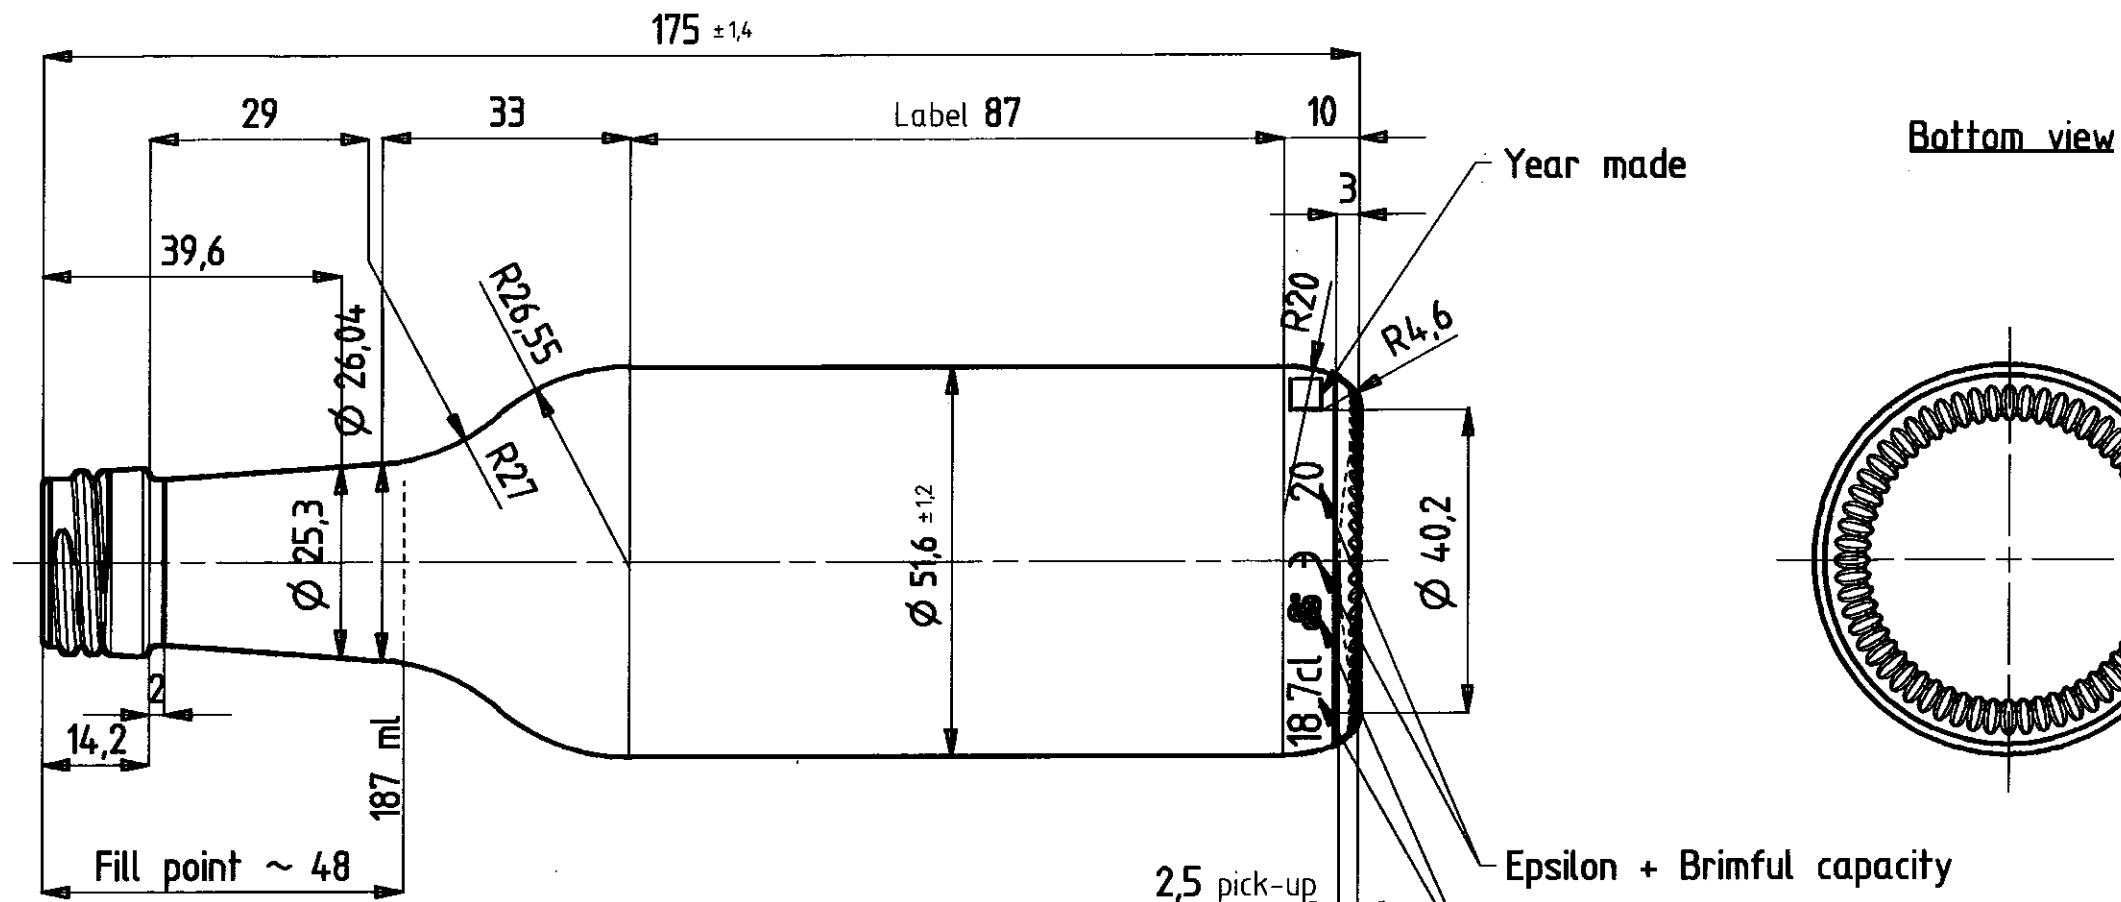

INDEX	ZMENY / modifications	DAT	JMENO	SOUHLAS TECHNOLOGA PT approved	DAT	VIS	TEPLOTA PLNENI Filling temperature	NOMINAL OBJEM Capacity fillpoint	POZNAMKA Remarks
				SOUHLAS TECHNOLOGA PT approved	2010 01.10	HS	TEPLOTA PLNENI Filling temperature	187 ml ± ml	
				SOUHLAS TECHNOLOGA PT approved	2010 01.10	HS	TEPLOTA ZPRACOVANI Conditioning temperature	200 ml ± 6 ml	ZAKAZNIK Customer
				VYR.ZA/OD VMG	DAT	VIS	OBSAH CO ₂ CO ₂ content	~ 155 g	PODOBNY JAKO Similar to
				VYR.ZA/OD	DAT	VIS	OBSAH ALKOHOLU Alcohol content	2.52 mm	NAHRAZUJE Replace No
				VYR.ZA/OD	DAT	VIS	AXIALNI ZATIZENI Axial pressure	22 mm	NABIDKA CISLO Offer No
				NETOLEROVANE ROZMERY DLE DIN 6129			PRUMER POD USTIM Neck connection dia.	13 mm	MERITKO Scale
				dimensions without tolerances conform to standard DIN 6129			BARVA Color	WE GR OL	KRESLIL Des
							PROCES Process		DAT
									FILETYP
									AZ
									5W019.0187.3716
									A

vetropack
Vetropack Moravia Glass a.s.
CZ-69729 Kyjov
Tel: 00420-518 603 111
www.vetropack.com

CA BORDEAUX 187 ml

VYROBEK CISLO
Item No
5W019.0187.3716
INDEX
A